

SUBSEQUENT INSTALLATION OF WINDSHIELD WIPER ASSEMBLY

From

Coupe identification-No. 101 693
Cabriolet identification-No. 150 001
Hardtop identification-No. 200 001

the windshield wiper assembly 644.628.017.12 for the above mentioned types can be installed subsequently.

The windshield wiper assembly may be installed in same sequence as described in group L of the Supplement to the Workshop Manual 356 B.

Attention should be paid to the following points:

1. To facilitate removal and installation the glove box has to be removed.
2. Install push-pull rheostat switch No. 644.613.511.00, as illustrated in Fig. 1.
3. Reposition wires as appropriate, see page SL 3
Wire cross-section should be at least 1.5 sq. mm (.0023 sq. in.). Wires should be connected according to wiring diagramm page SL 3
4. Enlarge wiper arm openings in the body to 18,2mm (.717 in.). dia.

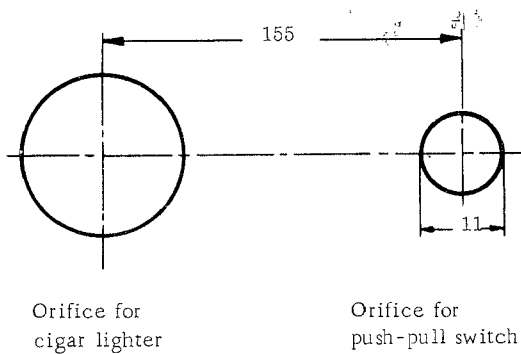


Fig. 1

When installing the windshield wiper assembly in automobiles with right-hand drive, attention should be paid to the following points:

1. The connecting rod of the windshield wiper must in the end position be turned 180°, as opposed to the left-hand drive automobiles, namely pointing to the left.
2. Mount the removable joint bar on the right-hand side.

The end position of the wiper blades is on the right.